


Oil Gauging

- Chrome Clad® for dark (heavy oils)
- Nubian® for light (clear oils)
- "Double Duty" oil gauging tapes with both Chrome Clad® and Nubian® (black) for dark (heavy) and light (clear) oils
- Made of heavy gauge 1/2" (13mm) x .012" (0.3mm) steel
- Snap-swivel hook on front end of tape for a plumb bob
- Two arm frames for shorter lengths; four arm frames for 30m/100' and greater
- Large drums and winding handles for quick and easy rewinding
- Handle folds over for storage and to lock line at extended position

Plumb bobs are not supplied with tapes. The last part of the catalog number denotes the style of the bob the tape is made to accept. Lufkin oil gauging tapes and plumb bobs are manufactured to meet the applicable specifications outlined in the National Institute of Standards and Technology Handbook 44, 2011 Edition, Section 5.52. Manufacturing tolerances for final measurement comply with API MPMS Second Edition, August 2005, Chapter 3, Section 1A, Appendix 1.2.

1. Never gauge a tank during an electrical storm.
2. Ground yourself and your tools by touching the tank ladder before climbing the ladder. Do not wear gloves when grounding yourself. Gloves prevent proper grounding.
3. Ground yourself before opening the gauging hatch by touching the handrail or platform (without gloves on). During and after removal of the gauging cover, stand so that the gas will not be inhaled. Wear a gas mask if toxic gases are present.
4. Always maintain contact between the gauging tape and the edge of the hatch from the moment the gauge bob enters the hatch until the gauge bob is removed from the hatch.

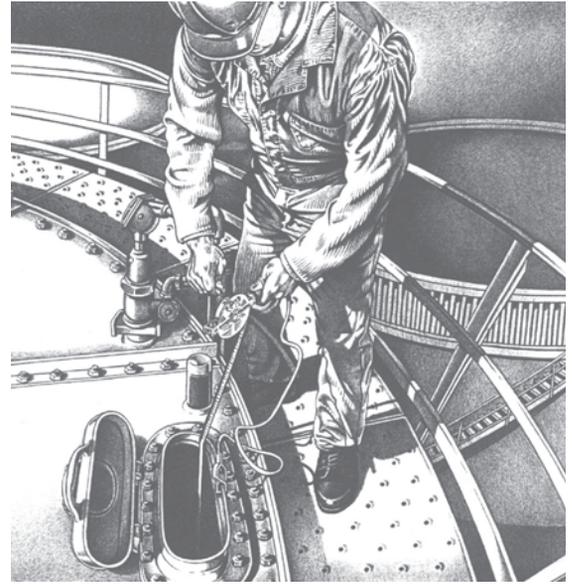

Lufkin

Atlas® Chrome Clad® / Nubian® Double Duty

- Black markings bonded to steel and recessed beneath multiple layers of nickel and chrome electroplating provides greater resistance to wear and corrosion
- All tapes read right to left
- Heavy-duty frame designed for years of rugged use
- All frames include a grounding strap
- Plumb bob must be ordered separately



Cat. No.	Bob Cut	UPC No.	Packed	Blade Size		Blade Style	Pack Wt.		Shelf Pack	Replacement Blade	UPC No.
				Width	Length		lb	kg			
CN129012SF590	590	037103459527	Boxed	1/2"	18'	D1	1.25	.57	1	OCN129012SF590	037103459633
CN1290SF590	590	037103459534	Boxed	1/2"	25'	D1	1.51	.68	1	OCN1290SF590	037103459640
CN1290SMEF590	590	037103001696	Boxed	1/2"(13mm)	25'(8m)	D3	1.51	.68	1	-	-
CN1291SF590	590	037103459541	Boxed	1/2"	33'	D1	1.65	.75	1	OCN1291SF590	037103459657
CN1293SF58712	5871/2	037103459763	Boxed	1/2"	50'	D1	2.07	.94	1	-	-
CN1293SF590	590	037103459558	Boxed	1/2"	50'	D1	2.07	.94	1	OCN1293SF590	037103459664
CN1293SDF590	590	037103459596	Boxed	1/2"	50'	D2	2.07	.94	1	-	-
CN1293SMEF590	590	37103459602	Boxed	1/2"(13mm)	50'(15m)	D3	2.07	.94	1	OCN1293SMEF590	037103459718
CN1294SF58712	5871/2	037103459770	Boxed	1/2"	66'	D1	2.38	1.08	1	-	-
CN1294SF590	590	037103459565	Boxed	1/2"	66'	D1	2.38	1.08	1	OCN1294SF590	037103459671
CN1294SMEF590	590	037103459619	Boxed	1/2"(13mm)	66'(20m)	D3	2.38	1.08	1	OCN1294SMEF590	037103459725
CN1295SF590	590	037103459572	Boxed	1/2"	75'	D1	2.57	1.17	1	OCN1295SF590	037103459688
CN1295SMEF58712	5871/2	037103440815	Boxed	1/2"(13mm)	75'(23m)	D3	2.57	1.17	1	-	-
CN1295SMEF590	590	037103122124	Boxed	1/2"(13mm)	75'(23m)	D3	2.88	1.31	1	OCN1295SME590	037103122117
CN1296SF590	590	037103459589	Boxed	1/2"	100'	D1	3.4	1.54	1	OCN1296SF590	037103459695
CN1296SMEF590	590	037103459626	Boxed	1/2"(13mm)	100'(30m)	D3	3.46	1.57	1	OCN1296SMEF590	037103459732
CN1298SMEF590	590	037103104243	Boxed	1/2"(13mm)	125'(38m)	D3	3.89	1.76	1	-	-