



STANDARD MBR UNITS

6540369 PUMP EVAC SE 044A, 3x400 V 50 Hz

6540370 PUMP EVAC SE 044A, 3x460 V 60 Hz

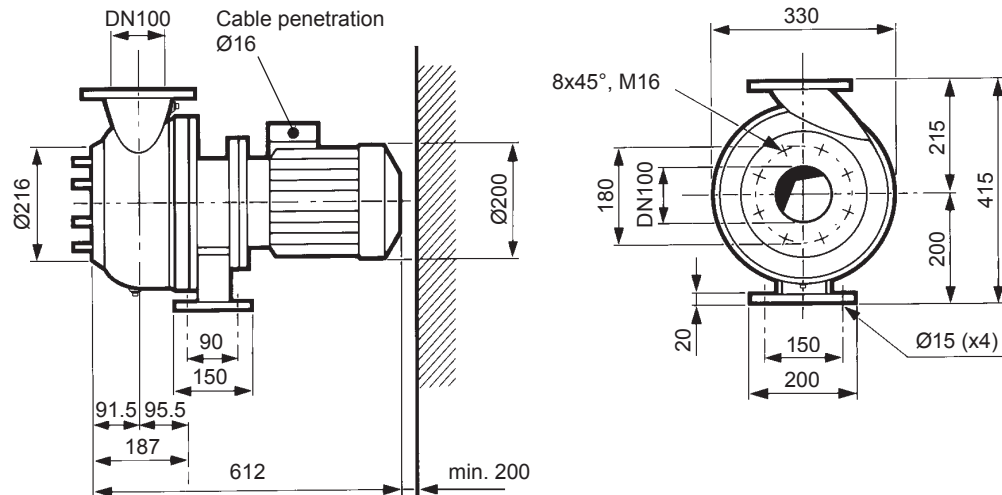

Capacity

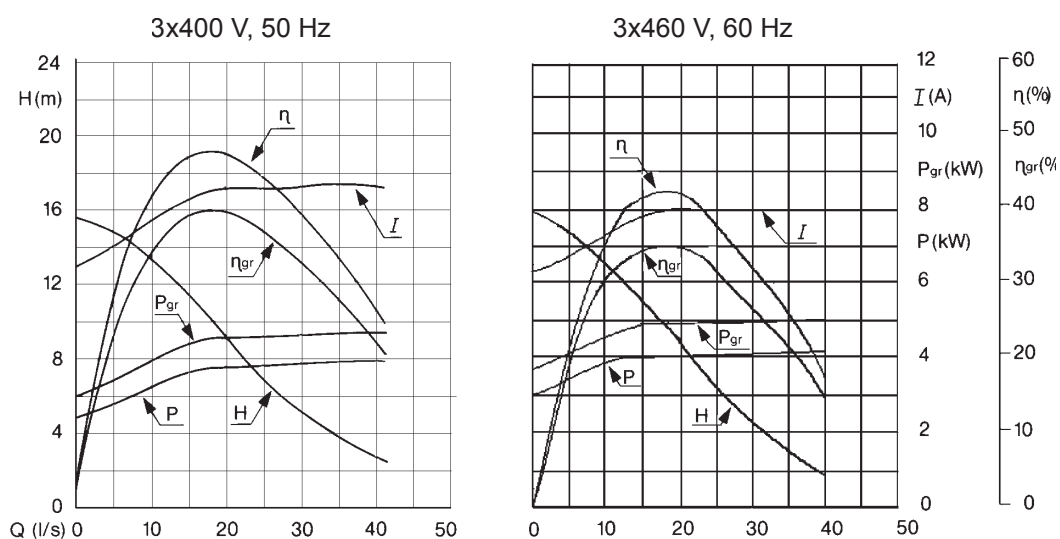

Electrical data

Voltage: 3x400/460 V 50/60 Hz
Nominal power: 4.0/4.8 kW, 50/60 Hz
Nominal current: 9.15/9.0 A, 50/60 Hz
Rotation speed: 1430 / 1730 rpm, 50/60 Hz
Insulation class: F (140°C-155°C)
Protection class: IP55

Materials

Pump casing and sealing housing: Cast iron EN-GJL-200 SFS-EN 1561
Impeller: Ductile iron EN-GJS-500 SFS-EN 1563
Shaft: Stainless steel SIS 2324
Nuts, screws and impeller key: Stainless steel SIS 2333
Mechanical seals: Fluoric rubber (VITON), Silicon carbide coated carbon, Stainless steel SIS 2343

Other

Impeller: Ø235/210, 50/60 Hz

Shipping data

Net weight: 84 kg